

LED-RENO

rechargeable doorlight | 130 lm | CRI>80

Product code: 66015



Rechargeable doorlight

LIMENTE LED-RENO is a rechargeable light fixture designed to illuminate the insides of drawers or cabinets. LED-RENO has a rechargeable battery, so no wiring is needed and the fixture is easy to install inside any type of a drawer, cabinet or cupboard. The fixture suits cabinets and cupboards as well as drawers in kitchens, in bedrooms, and anyplace, where the dark insides of cabinets and drawers need light.

The fixture attaches with a magnet and is easy to recharge with a USB portal. LIMENTE LED-RENO can be used for short-term lighting (when light is needed only separate, short spaces of time at a time) and as a cabinet light. When wanting short-time lighting, turn the fixture on and off with a wave of a hand. When using LED-RENO as a cabinet light, the light turns on when the door is opened and turns off when the door is closed.

Dimming and lighting control

LIMENTE LED-RENO has two different settings, which enable the use of the fixture both as a worktop light and a cabinet light.

A-setting activates the integrated ON/OFF switch of the fixture, which turns on the light when the door is opened. The light turns off when the door is closed. The light turns automatically off after two minutes, in case the door is not closed. The fixture is placed near the front end of the cabinet for the switch to recognize the door opening.

M-setting activates the integrated ON/OFF switch of the fixture, which turns on the light when waving a hand in front of the sensor. With a second wave of a hand, the light turns off. The light does not turn off automatically but is lit until it's turned off or the battery runs out. The battery duration is maximum three hours.

LIMENTE LED-RENO is not dimmable.

Installation

LIMENTE LED-RENO can be placed anywhere without any limitations. Decide the amount of fixtures needed and install the installation plates with double-sided tape in place. Then attach the fixture with the magnet. No wiring or outside power is needed!

Place the fixture near the front end of the cabinet. If the fixture is too far from the door, the switch is not able to register the door opening.

THE FOLLOWING ITEMS ARE INCLUDED

- rechargeable lampmetal fasteners
- USB charging cable

RENO AL SPOTLIGHT



OVERVIEW

PRODUCT CODE	66015
GTIN-CODE	6438400001916
ELECTRICAL NUMBER	4129719
ETIM GENERAL NAME	Furniture luminaire
ETIM CLASS	Downlight/spot/floodlight EC001744
ETIM GROUP	41 Domestic light fittings
COLOUR	Alulook
LAMP TYPE	LED

SPECIFICATIONS


PRODUCT DIMENSIONS	200.0 x 39.0 x 11.0
MOUNTING METHOD	Surface mounting
COLOUR TEMPERATURE	4000 K
COLOUR RENDERING INDEX CRI	> 80
RATED LIFE TIME	35.000h (L80B10)
ENERGY EFFICIENCY CLASS	
LUMINOUS FLUX	130 lm
EFFICIENCY	44 lm/W
VOLTAGE	5 V DC
INGRESS PROTECTION CODE	IP20
NUMBER OF LEDS/M	
INPUT POWER	3 W
NUMBER OF SWITCHING CYCLES	> 20 000
AMBIENT TEMPERATURE RANGE	-20°C~50°C
INPUT POWER CONNECTOR	
WARRANTY PERIOD (MONTHS)	24
ADDITIONAL COVER (MONTHS)	
INSTALLATION AND OPERATING MANUAL	https://www.limente.fi/Images/productpics/instructions/limente_led-reno.pdf

RENO AL SPOTLIGHT

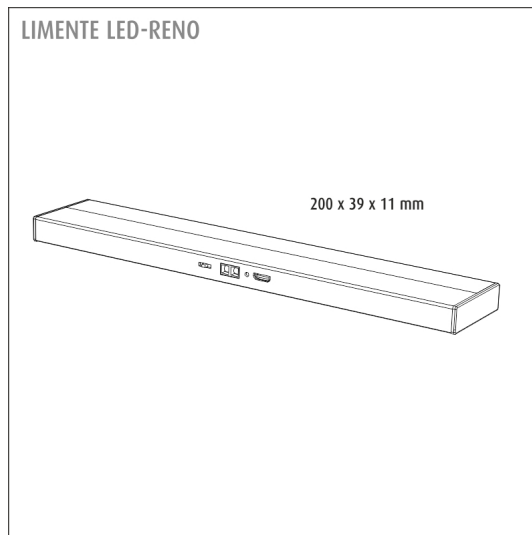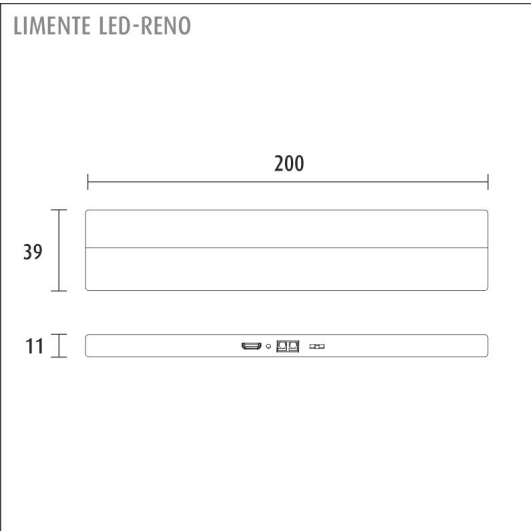

RENO AL SPOTLIGHT

Led-Reno

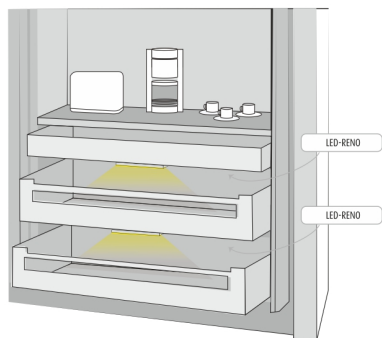

LIMENTE
HELSINKI