

## LINEA CCT LUX

4m | 2700 - 6000 K | aluminum | IP44 | 1500 lm/m | CRI>90 | alumiini  
Product code: 682315

### A versatile light profile fixture with color temperature adjustment

LIMENTE LINEA IP44 CCT is a part of LIMENTE CCT collection, which is not only dimmable but the color temperature is adjustable. When adjusting the color temperature of lighting in your home, you can change the ambience to suit any mood.

LIMENTE LINEA IP44 CCT is a versatile light fixture suitable for either working light or mood light. The fixture can be used in kitchen workspace but also to provide indirect lighting when placed above upper cabinets, in plinths, in ceilings or inside a wardrobe or any other space, where light is needed.

[Learn more from our website](#)

### Dimming and lighting control


Appropriate lighting for any occasion is made easy with our dimming and lighting control system. You can easily change the lighting and ambience in your home from efficient and bright to dim and cosy by dimming your LIMENTE LINEA IP44 CCT with our wireless system. You can use the same switch to adjust all the LIMENTE CCT lights in the room. The light and color temperature adjust smoothly at the same time while creating ambience for working, entertaining or any mood in between.

[Learn more from our website](#)

### Easy installation

LIMENTE LINEA IP44 CCT is fast and easy to install with the installation tools included.

[Learn more from our website](#)

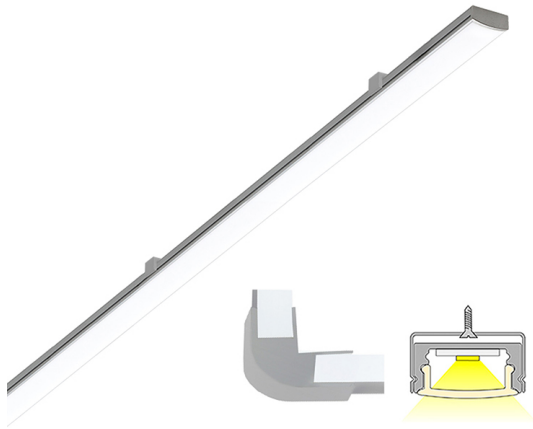

#### THE FOLLOWING ITEMS ARE INCLUDED

- 2 x 2m aluminum profiles + diffusert
- 1m aluminum profile + diffusert (conduit)
- mounting clips x 11
- end-caps x 6
- plastic corner pieces (90°) x 3
- led-ribbon 4 m, with 1,5 m power cord cord in both ends
- 1,5 m power cords 2 pcs

## LINEA 40 CCT LUX AL PROF.LIGHT

## OVERVIEW

PRODUCT CODE	682315
GTIN-CODE	6430022820494
ELECTRICAL NUMBER	4118917
ETIM GENERAL NAME	Light ribbon-/hose/-strip
ETIM CLASS	Light ribbon-/hose/-strip EC002706
ETIM GROUP	41 Domestic light fittings
COLOUR	Alulook
LAMP TYPE	LED

## SPECIFICATIONS

PRODUCT DIMENSIONS	4000.0 x 10.0 x 3.0
MOUNTING METHOD	Surface mounting
COLOUR TEMPERATURE	2700 - 6000 K
COLOUR RENDERING INDEX CRI	> 90
RATED LIFE TIME	120.000h
ENERGY EFFICIENCY CLASS	
LUMINOUS FLUX	1500 lm/m
EFFICIENCY	
VOLTAGE	24 V DC
INGRESS PROTECTION CODE	IP44
NUMBER OF LEDS/M	196
INPUT POWER	58 W
NUMBER OF SWITCHING CYCLES	> 50 000
AMBIENT TEMPERATURE RANGE	-20°C -+50°C
INPUT POWER CONNECTOR	
WARRANTY PERIOD (MONTHS)	24
ADDITIONAL COVER (MONTHS)	12
INSTALLATION AND OPERATING MANUAL	<a href="https://www.limente.fi/Images/productpics/instructions/limente_led-linea.pdf">https://www.limente.fi/Images/productpics/instructions/limente_led-linea.pdf</a>

## LINEA 40 CCT LUX AL PROF.LIGHT

## RECOMMENDED ACCESSORIES

PRODUCT CODE	PRODUCT
LED28030	LIMENTE POWER SUPPLY, WHITE, 24 V, 30W, INTEGRATED CONNECTORS
LED28060	LIMENTE POWER SUPPLY, WHITE, 24 V, 60W, INTEGRATED CONNECTORS
LED28100	LIMENTE POWER SUPPLY, WHITE, 24 V, 100W, INTEGRATED CONNECTORS
640561	SMART 561, LUXUS CCT-CONTROL, 24 V, WHITE
640562	SMART 562, GREENLINE CCT-CONTROL, 24 V, WHITE
640563	SMART 563, LUXUS CCT-CONTROL, 24 V, BLACK
640560	SMART 560, CCT RECEIVER, CCT 24 V

## LINEA 40 CCT LUX AL PROF.LIGHT

