


## WALL 20 CCT LUX

2m | 2700 - 6000 K | aluminum | IP44 | 1500 lm/m | CRI>90  
Product code: 682370

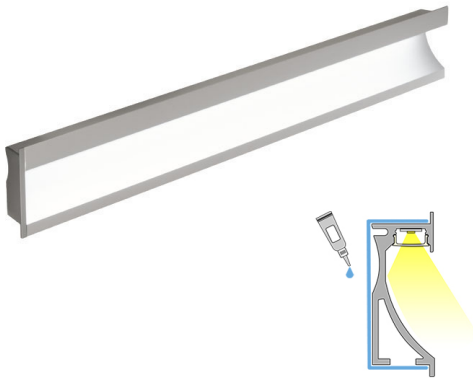

### An efficient wall-mounted, recessed light fixture with color temperature adjustment

Use WALL to bring light to table tops and stairs or sides of a wall. You're able to create safety lighting for dark hallways with WALL. You can also use WALL as indirect mood light in any room. The end result is always spectacular!

WALL is only 26mm deep allowing installation on a sheet wall without alterations to wall support structures. The led strip can be shortened to a desired length at 3,3 cm intervals, whereas the profile has a standard length of 2m and can be shortened to a desired length.

[Learn more from our website](#)

### Dimming and lighting control

Appropriate lighting for any occasion is made easy with our dimming and lighting control system. You can easily change the lighting and ambience in your home from efficient and bright to dim and cozy by dimming your LIMENTE WALL IP44 CCT with our wireless system. You can use the same switch to adjust all the LIMENTE CCT lights in the room. The light and color temperature adjust smoothly at the same time while creating ambience for working, entertaining or any mood in between.

[Learn more from our website](#)

### Installation

LIMENTE WALL IP44 CCT is fast and easy to install with the installation tools included.

[Learn more from our website](#)



### THE FOLLOWING ITEMS ARE INCLUDED

- aluminum profile 2 m
- end pieces x 4
- led-ribbon 2 m, with 1,5m power cord in both ends
- 1,5 m power cords 2 pcs

## WALL 20 CCT LUX AL PROF.LIGHT

## OVERVIEW

PRODUCT CODE	682370
GTIN-CODE	6438400002142
ELECTRICAL NUMBER	4129742
ETIM GENERAL NAME	Light ribbon-/hose/-strip
ETIM CLASS	Light ribbon-/hose/-strip EC002706
ETIM GROUP	41 Domestic light fittings
COLOUR	Alulook
LAMP TYPE	LED

## SPECIFICATIONS

PRODUCT DIMENSIONS	2000.0 x 76.2 x 26.5
MOUNTING METHOD	Flush mounting
COLOUR TEMPERATURE	2700 - 6000 K
COLOUR RENDERING INDEX CRI	> 90
RATED LIFE TIME	
ENERGY EFFICIENCY CLASS	
LUMINOUS FLUX	1500 lm/m
EFFICIENCY	105 lm/W
VOLTAGE	24 V DC
INGRESS PROTECTION CODE	IP44
NUMBER OF LEDS/M	180
INPUT POWER	29 W
NUMBER OF SWITCHING CYCLES	> 50 000
AMBIENT TEMPERATURE RANGE	-20°C -+50°C
INPUT POWER CONNECTOR	
WARRANTY PERIOD (MONTHS)	24
ADDITIONAL COVER (MONTHS)	12
INSTALLATION AND OPERATING MANUAL	<a href="https://www.limente.fi/Images/productpics/instructions/limente_led-wall.pdf">https://www.limente.fi/Images/productpics/instructions/limente_led-wall.pdf</a>

## WALL 20 CCT LUX AL PROF.LIGHT

## RECOMMENDED ACCESSORIES

PRODUCT CODE	PRODUCT
LED28030	LIMENTE POWER SUPPLY, WHITE, 24 V, 30W, INTEGRATED CONNECTORS
LED28060	LIMENTE POWER SUPPLY, WHITE, 24 V, 60W, INTEGRATED CONNECTORS
LED28100	LIMENTE POWER SUPPLY, WHITE, 24 V, 100W, INTEGRATED CONNECTORS
640560	SMART 560, CCT RECEIVER, CCT 24 V
640561	SMART 561, LUXUS CCT-CONTROL, 24 V, WHITE
640562	SMART 562, GREENLINE CCT-CONTROL, 24 V, WHITE
640563	SMART 563, LUXUS CCT-CONTROL, 24 V, BLACK

## WALL 20 CCT LUX AL PROF.LIGHT

