

## DUO 40

4m | 4000 K | white | 2x1512 lm/m | 192 led/m | CRI>85  
Product code: 682380



### An up & down wall light fixture

LIMENTE DUO IP44 CCT is a minimalistic and sleek wall light profile fixture that projects light up and down. The fixture is available in both black and white. DUO can be used in private homes and in public spaces as an eye-catcher, a mood light or a functional light for reading or above a couch.

You can control both the upward projecting light and the downward projecting light separately when needed. Using DUO enables carrying out beautiful and stylish indirect lighting designs in different kinds of spaces, including in the bathroom due to the fixtures IP44 classification.

[Learn more from our website](#)

### Dimming and lighting control


Appropriate lighting for any occasion is made easy with our dimming and lighting control system. You can easily change the lighting and ambience in your home from efficient and bright to dim and cozy by dimming your LIMENTE DUO with our wireless system. You can use the same switch to adjust all the LIMENTE lights in the room, including various ceiling, panel and profile lights. The light adjusts smoothly at the same time while creating ambience for working, entertaining or any mood in between.

[Learn more from our website](#)

### Easy installation

LIMENTE DUO IP44 B is fast and easy to install with the installation tools included.

[Learn more from our website](#)

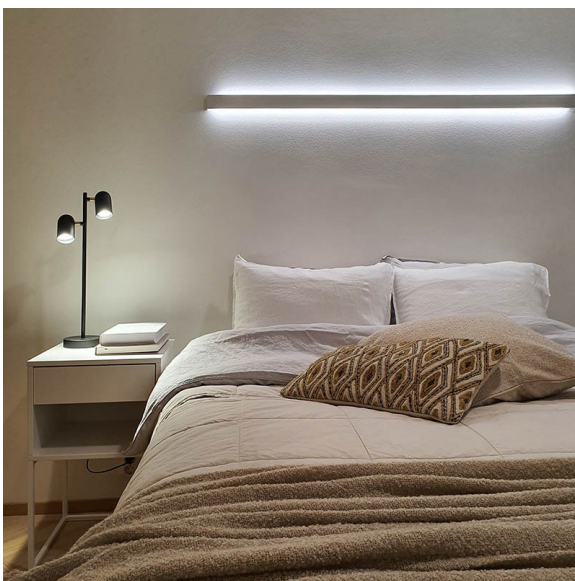

### THE FOLLOWING ITEMS ARE INCLUDED

- aluminum profile 2 m x 2
- end pieces x 8
- mounting clips x 12
- 2 x led-ribbon 4 m, with driver in both ends
- 3m power cords 2 pcs

## DUO 40 COM 4K WH PROFILE LIGHT

## OVERVIEW

PRODUCT CODE	682380
GTIN-CODE	6438400002241
ELECTRICAL NUMBER	4129752
ETIM GENERAL NAME	Light ribbon-/hose/-strip
ETIM CLASS	Light ribbon-/hose/-strip EC002706
ETIM GROUP	41 Domestic light fittings
COLOUR	White
LAMP TYPE	LED

## SPECIFICATIONS

PRODUCT DIMENSIONS	4000.0 x 48.5 x 17.8
MOUNTING METHOD	Surface mounting
COLOUR TEMPERATURE	4000 K
COLOUR RENDERING INDEX CRI	> 85
RATED LIFE TIME	
ENERGY EFFICIENCY CLASS	
LUMINOUS FLUX	2 x 1512 lm/m
EFFICIENCY	126 lm/W
VOLTAGE	24 V DC
INGRESS PROTECTION CODE	IP44
NUMBER OF LEDS/M	180
INPUT POWER	2 x 48 W
NUMBER OF SWITCHING CYCLES	> 50 000
AMBIENT TEMPERATURE RANGE	-20°C -+50°C
INPUT POWER CONNECTOR	
WARRANTY PERIOD (MONTHS)	24
ADDITIONAL COVER (MONTHS)	12
INSTALLATION AND OPERATING MANUAL	<a href="https://www.limente.fi/Images/productpics/instructions/limente_led-duo.pdf">https://www.limente.fi/Images/productpics/instructions/limente_led-duo.pdf</a>

## DUO 40 COM 4K WH PROFILE LIGHT

## RECOMMENDED ACCESSORIES

PRODUCT CODE	PRODUCT
LED28030	LIMENTE POWER SUPPLY, WHITE, 24 V, 30W, INTEGRATED CONNECTORS
LED28060	LIMENTE POWER SUPPLY, WHITE, 24 V, 60W, INTEGRATED CONNECTORS
LED28100	LIMENTE POWER SUPPLY, WHITE, 24 V, 100W, INTEGRATED CONNECTORS
640551	SMART 551, LUXUS LIGHTCONTROL KIT, 24 V, WHITE
640552	SMART 552, LUXUS LIGHTCONTROL KIT, 24 V, WHITE
640554	SMART 554, LUXUS LIGHTCONTROL KIT, 24 V, BLACK
640556	SMART 556, GREENLINE LIGHTCONTROL KIT, 24 V, WHITE
640557	SMART 557, GREENLINE LIGHTCONTROL KIT, 24 V, WHITE
640425	SMART 425, WIRELESS LIGHT CONTROL

## DUO 40 COM 4K WH PROFILE LIGHT

