


## WALL 40

4m | 4000 K | aluminum | 192 led/m | 1512 lm/m | CRI>85  
Product code: 682383

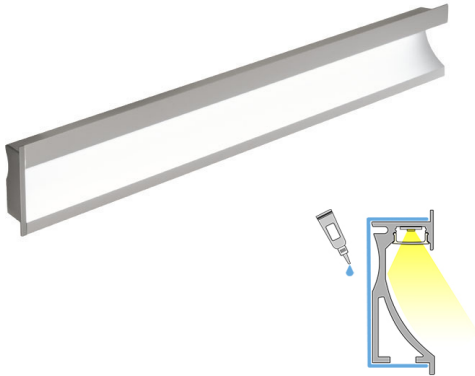

### An efficient wall-mounted, recessed light fixture

Use WALL to bring light to table tops and stairs or sides of a wall. You're able to create safety lighting for dark hallways with WALL. You can also use WALL as indirect mood light in any room. The end result is always spectacular!

WALL is only 26mm deep allowing installation on a sheet wall without alterations to wall support structures. The led strip can be shortened to a desired length at 3,3 cm intervals, whereas the profile has a standard length of 2m and can be shortened to a desired length.

[Learn more from our website](#)

### Dimming and lighting control

Appropriate lighting for any occasion is made easy with our dimming and lighting control system. You can easily change the lighting and ambience in your home from efficient and bright to dim and cozy by dimming your LIMENTE WALL IP44 B with our wireless system. You can use the same switch to adjust all the LIMENTE lights in the room, including various ceiling, panel and profile lights. The light adjusts smoothly at the same time while creating ambience for working, entertaining or any mood in between.

[Learn more from our website](#)

### Installation

LIMENTE WALL IP44 B is fast and easy to install with the installation tools included.

[Learn more from our website](#)



### THE FOLLOWING ITEMS ARE INCLUDED

- aluminum profile 2 m x 2
- end pieces x 8
- led-ribbon 4 m, with driver in both ends
- 3m power cords 2 pcs

## WALL 40 COM 4K AL PROF.LIGHT

## OVERVIEW

PRODUCT CODE	682383
GTIN-CODE	6438400002272
ELECTRICAL NUMBER	4129755
ETIM GENERAL NAME	Light ribbon-/hose/-strip
ETIM CLASS	Light ribbon-/hose/-strip EC002706
ETIM GROUP	41 Domestic light fittings
COLOUR	Alulook
LAMP TYPE	LED

## SPECIFICATIONS

PRODUCT DIMENSIONS	4000.0 x 76.2 x 26.5
MOUNTING METHOD	Flush mounting
COLOUR TEMPERATURE	4000 K
COLOUR RENDERING INDEX CRI	> 85
RATED LIFE TIME	36.000h (L80B10), 84.000h (L70B50)
ENERGY EFFICIENCY CLASS	
LUMINOUS FLUX	1512 lm/m
EFFICIENCY	126 lm/W
VOLTAGE	24 V DC
INGRESS PROTECTION CODE	IP44
NUMBER OF LEDS/M	180
INPUT POWER	48 W
NUMBER OF SWITCHING CYCLES	> 50 000
AMBIENT TEMPERATURE RANGE	-20°C~50°C
INPUT POWER CONNECTOR	
WARRANTY PERIOD (MONTHS)	24
ADDITIONAL COVER (MONTHS)	12
INSTALLATION AND OPERATING MANUAL	<a href="https://www.limente.fi/Images/productpics/instructions/limente_led-wall.pdf">https://www.limente.fi/Images/productpics/instructions/limente_led-wall.pdf</a>

## WALL 40 COM 4K AL PROF.LIGHT

## RECOMMENDED ACCESSORIES

PRODUCT CODE	PRODUCT
LED28030	LIMENTE POWER SUPPLY, WHITE, 24 V, 30W, INTEGRATED CONNECTORS
LED28060	LIMENTE POWER SUPPLY, WHITE, 24 V, 60W, INTEGRATED CONNECTORS
LED28100	LIMENTE POWER SUPPLY, WHITE, 24 V, 100W, INTEGRATED CONNECTORS
640420	SMART 420, WIRELESS LIGHT CONTROL
640421	SMART 421, WIRELESS LIGHT CONTROL
640422	SMART 422, WIRELESS LIGHT CONTROL
640424	SMART 422, WIRELESS LIGHT CONTROL
640425	SMART 425, WIRELESS LIGHT CONTROL

## WALL 40 COM 4K AL PROF.LIGHT

