

## KIT-SLIM 110 CM SET

3000 K | aluminium | 1500 lm/m | CRI>80

Product code: 96225



### An extendable profile fixture

LIMENTE SLIM is a versatile lighting system that allows you to custom design and build your own lighting system. The fixture is available in color temperatures of 3000K and 4000K and allows you to build unified lighting, where corners are also illuminated. The SLIM is well suited for a kitchen workspace, a showcase, inside a wardrobe, for store shelves and any space, where stylish, uniform and efficient lighting is desired. The LIMENTE SLIM system is available in sections of 10, 20, 30, 50 and 100 cm lengths. Don't forget the 90-degree corner pieces and the flexible corner pieces available!

### Dimming and lighting control


Appropriate lighting for any occasion is made easy with our dimming and lighting control system. You can easily change the lighting and ambience in your home from efficient and bright to dim and cozy by dimming your LIMENTE SLIM 3000K with our wireless system. You can use the same switch to adjust all the LIMENTE lights in the room, including various ceiling, panel and profile lights. The light adjusts smoothly at the same time while creating ambience for working, entertaining or any mood in between.

[Learn more from our website](#)

### Installation

The system is simple to design and implement by following the instructions below.

[Learn more from our website](#)

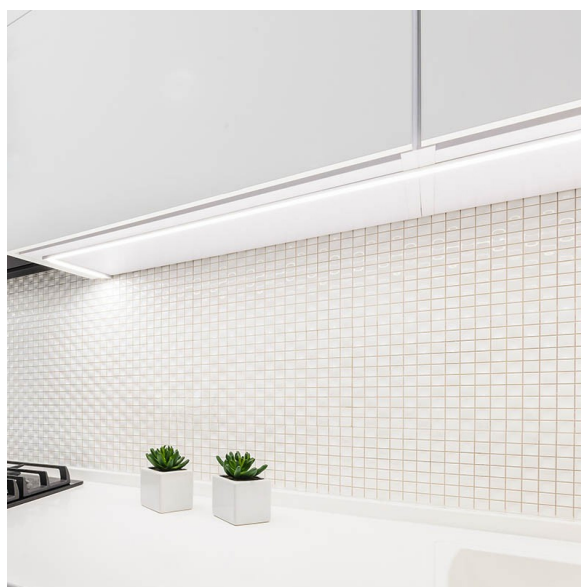

### THE FOLLOWING ITEMS ARE INCLUDED

- profillamp 3 x 30
- slim P2 5,5W midpowerfeed cable 3000K + 20cm light profile with 3 m cable
- driver 60 W

## KIT-SLIM 110CM 3K

## OVERVIEW

PRODUCT CODE	96225
GTIN-CODE	6438400004931
ELECTRICAL NUMBER	4139903
ETIM GENERAL NAME	Light ribbon-/hose/-strip
ETIM CLASS	Light ribbon-/hose/-strip EC002706
ETIM GROUP	41 Domestic light fittings
COLOUR	Alulook
LAMP TYPE	LED

## SPECIFICATIONS

PRODUCT DIMENSIONS	1144.0 x 30.0 x 12.0
MOUNTING METHOD	Surface mounting
COLOUR TEMPERATURE	3000 K
COLOUR RENDERING INDEX CRI	> 80
RATED LIFE TIME	35.000h (L80B10)
ENERGY EFFICIENCY CLASS	
LUMINOUS FLUX	450 lm
EFFICIENCY	53 lm/W
VOLTAGE	24 V DC
INGRESS PROTECTION CODE	IP21
NUMBER OF LEDS/M	
INPUT POWER	31 W
NUMBER OF SWITCHING CYCLES	> 50 000
AMBIENT TEMPERATURE RANGE	-20°C~50°C
INPUT POWER CONNECTOR	Top, hole Ø 8 mm
WARRANTY PERIOD (MONTHS)	24
ADDITIONAL COVER (MONTHS)	
INSTALLATION AND OPERATING MANUAL	<a href="https://www.limente.fi/Images/productpics/instructions/limente_led-slim.pdf">https://www.limente.fi/Images/productpics/instructions/limente_led-slim.pdf</a>

## KIT-SLIM 110CM 3K

## RECOMMENDED ACCESSORIES

PRODUCT CODE	PRODUCT
LED28030	LIMENTE POWER SUPPLY, WHITE, 24 V, 30W, INTEGRATED CONNECTORS
LED28060	LIMENTE POWER SUPPLY, WHITE, 24 V, 60W, INTEGRATED CONNECTORS
LED28100	LIMENTE POWER SUPPLY, WHITE, 24 V, 100W, INTEGRATED CONNECTORS
640551	SMART 551, LUXUS LIGHTCONTROL KIT, 24 V, WHITE
640552	SMART 552, LUXUS LIGHTCONTROL KIT, 24 V, WHITE
640554	SMART 554, LUXUS LIGHTCONTROL KIT, 24 V, BLACK
640556	SMART 556, GREENLINE LIGHTCONTROL KIT, 24 V, WHITE
640557	SMART 557, GREENLINE LIGHTCONTROL KIT, 24 V, WHITE
640425	SMART 425, WIRELESS LIGHT CONTROL

## KIT-SLIM 110CM 3K

